


Inquiry #1007 Steamed Beech Class I

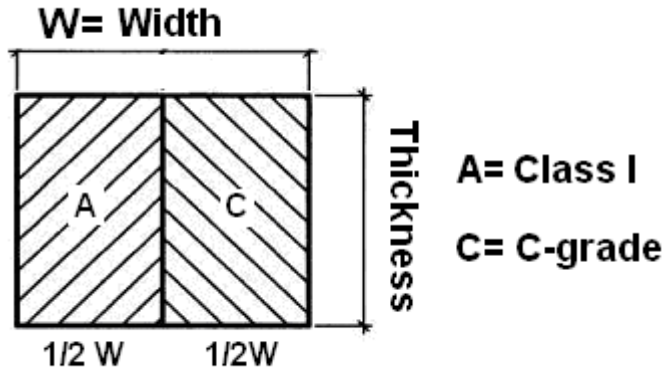

Commodity : Beech Strips for door **stiles**

Density : 650 – 800 kg/m³

Color : as sample

Tolerances : Thickness : ± 0.15 mm
 Width : - 0/+ 0.5 mm
 Length : - 0/+ 2 mm
 Bow/bending : 1.5 mm/meter

Moisture : KD, MC 6 – 8 % at packing

Quality : Light steamed, pre-planned or fine ripped, must be glued from 2 pcs as drawing using Glue D3, sound knots max 3 mm allowed.

For part A (Class I) Finger jointing, dead knots, spinning over 20 mm Ø, wane, bark, cracks, pith, redwood, pinholes, Brownwood not allowed.

For part C (C-Grade): Gluing of several layers allowed, Finger jointing allowed, no minimum wood length for finger jointing required, dead knots not allowed but 3-4 small black knots of maximum 2mm diameter allowed, sound knots any size allowed, putty fill not required, if you can keep the tolerances fine ripping is allowed.

Size and Quantities

Pos	Article No.	Dimensions in mm			Qty
		T	W	L	M3
1	FF35327010	33.1	35	1,997	41
2	FF35327020	33.1	35	2,122	132
3	FF35327030	33.1	35	2,372	12
4	FF35327045	33.1	35	2,912	5
5	FF35887010	38.1	35	1,997	5
6	FF35387020	38.1	35	2,122	22
7	FF35387030	38.1	35	2,372	3
8	FF35387045	38.1	35	2,912	1
9	FF48387030	38.1	48	2,372	15
10	FF48387045	38.1	48	2,912	10
11	FF48457030	45.1	48	2,372	49

Pos	Article No.	Dimensions in mm			Qty
		T	W	L	M3
12	FF48457045	45.1	48	2,912	2
13	FF48507030	50.1	48	2,372	17
14	FF48507045	50.1	48	2,912	0
15	FF48557010	55.1	48	1,997	17
16	FF48557020	55.1	48	2,122	50
17	FF48557030	55.1	48	2,372	9
18	FF48557045	55.1	48	2,912	2
19	FF48607010	60.1	48	1,997	41
20	FF48607020	60.1	48	2,122	95
21	FF48607030	60.1	48	2,372	13
22	FF48607045	60.1	48	2,912	7